

OPERATION INSTRUCTION



Video intercom system

2 Wire IP Digital Outdoor Station

User manual


Due to the regular upgrades of systems and products, could not guarantee exact consistency between the actual product and the written information in this manual.

92236G3_V1.00.251220

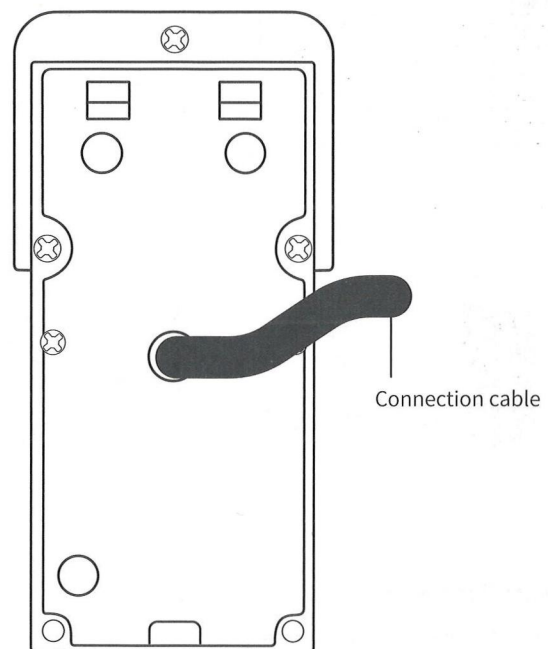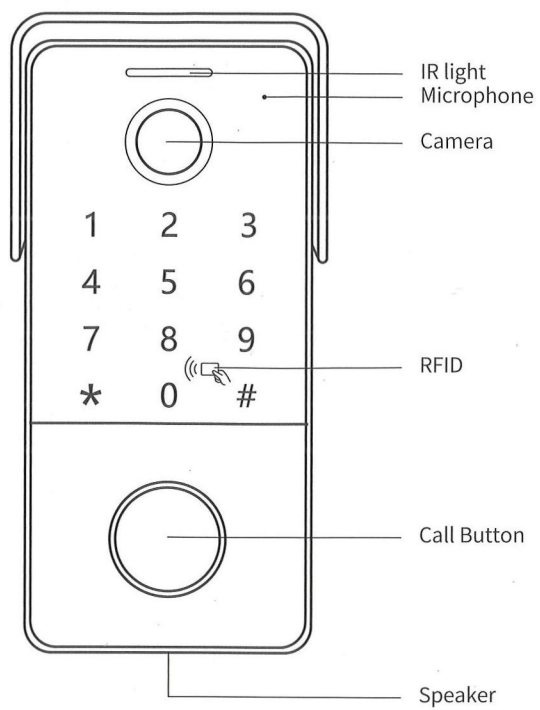


2.Specification and Installation

Camera	1/2.7" CMOS
View Angle	148°
Definition(Hor.)	4MP
Supplement Light	IR supplement
Working Current	< 200mA
Power Supply	24VDC
Waterproof	IP54
Working Temperature	-20 to +50°C
Installation	Flush mount

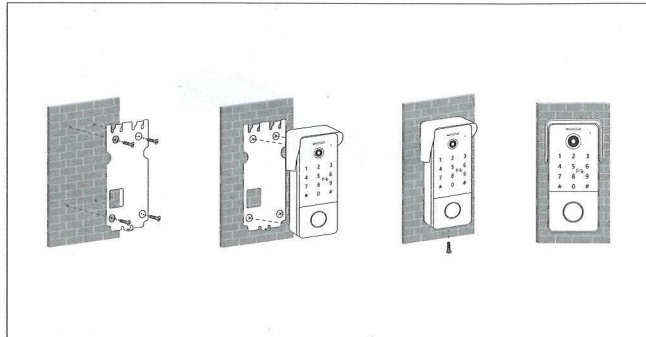

Installation process:


1. First drill 4mm~6mm diameter holes on wall
2. Install the rain cover with the 4pcs expansion bolts & screws
3. Connect the wires through the hole
4. Fasten the bottom screw

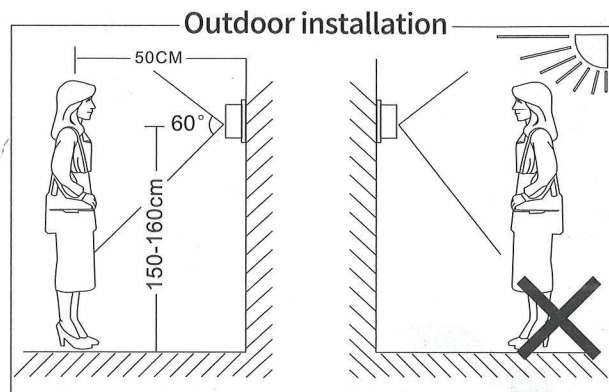

NOTE:

- Do not install the call panel in this environment e.g. Straight sunshine , contact rain , high temperature , high humidity , full of dust and chemistry corrosive.
- Switch off power supply before installation.
- Keep more than 30cm away from AC power supply to avoid external interference.
- Choose the best position to install, the horizontal view is 150cm.

3. Wiring Diagram

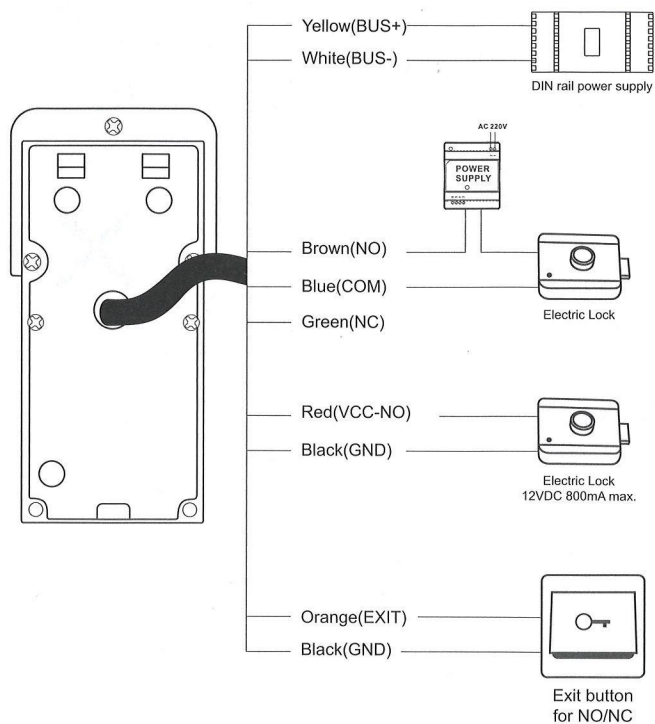

4. Operation and Setting

4.1 Operation

Password unlock

In standby mode, enter a password to unlock directly. If an incorrect password is entered, a "BiBi" beep will prompt.

RFID unlock

In standby mode, swipe a card to unlock directly. If an incorrect card is swiped, a "BiBi" beep will prompt.

Face unlock(optional)

In standby mode, press and hold the call button for 3 seconds (a "Bi" beep will sound). Scan your face within 10 seconds to unlock directly.

Palm vein unlock(optional)

In standby mode, press and hold the call button for 3 seconds (a "Bi" beep will sound). Scan your palm vein within 10 seconds to unlock directly.

*Note:

For instructions on how to set up RFID/face recognition/palm vein recognition, please refer to the relevant manual of the indoor monitor.

4.2 Restore Factory Setting

Press and hold the call button for 5 seconds within 20 seconds after the door station is power on, when you hear three bi-bi-bi beeps, it indicates that the factory reset was successful.