New copy instructions

Compatible with: fixed code/learning code remote control, some popular rolling code remote controls in China, Europe, North, South America and Australia in the follow table.

chipset compability : All of Fixed code and learning code
2260(All the manufacturers)
2262(All the manufacturers)
PT2264,5326(All the manufacturers)
SC5262,HT600,HT680,HT6207,HT6010,HT6012,
HT6014,SMC918 Series,527(All the manufacturers)
1527(All the manufacturers)
2240(All the manufacturers)

Compatible international brand list (MCU Types):

CAME TOP432NA	ALUTECH AT-4	DEA PUNT0-2 PUNT0-4
CAME TOP432EE	CAME TOP434M	DEA GENIE
CAME TOP432EV	ALLMATIC-AEMX1	DEA MIO TD2/TD4
CAME TOP 432A 434A	ALLMATIC- -AEMX2	DEA GT2M/4M
CAME TOP432S	ALLMATIC- -AEMX4	NICF - FL01/FL02
DOORHAN TRANSMITTER-2/4	DEA 433-1(237)	NICE - FL04
RPASTEL-MPSTF4E	MONSELGNEUR-ARC2	OPENOUT-TMQ433-4
GIBIDI-TMB 433-2 433-4	MONSELGNEUR-ARC4	TBLCOMA-TANG02SW
V2 ISC4	RIB-MOCN' 4	FADINI JUBI
BFT-TE04 TEO3 TE02	DEA 433-1 (238)	FAAC TM 433-2/433-3
DUCATI-6203	CASIT-ERTS20DB/DQ	TAU-250T- -BUG2/4
BENINCA LO. T2WK	CASIT-TXS6/TX53	SEAV-TXS4
BENINCA LO. T4WK	CASIT-ERTS92B	SEAV-TXS1
BENINCA TO GO 2WK	CASIT-SRTS92T	SEAV-TXS2
BENINCA TO GO 4WK	CASIT MPS TF2E	SEAV-TXS3
TAU-250-TXD2	CASIT MPS TF24	RPASTEL-MPSTF2E

Brands&models above are used directly without re-matching to the receivers

The photos of the brand list…(MCU Types)






Here is the way of copy

Memory Clearance:

1.Press button 1 and 2 simultaneous until LED flashes 3 times
2. Release button 2 (Keep pressing button 1), and press button 2 slowly for 3 times, LED flashes quickly.
3. Release both button, the duplicator is ready for copying

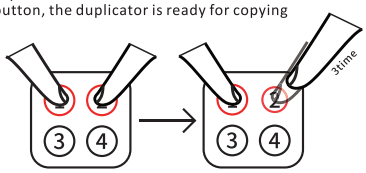


Duplicating:

Put duplicator aside of original transmitter, as close as possible.

Fixed code remote control:

Keep pressing button 1 of original transmitter& button 1 of duplicator until the duplicator' s LED flashes, which means the duplicating succeed. Repeat above step to the rest buttons. The duplicator will work after duplicating.

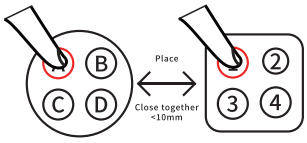


Rolling code remote control:

Keep pressing outton 1 of original transmitter& button 1 of duplicator until the duplicator' s LED flashes, which means the duplicating succeed.

Once 1 button duplicated, the rest buttons will generate automatically, please follow original receiver manual to insert the new duplicator on the receiver.

Resume:

If you erase the code by mistake, you can resume it. Press and hold buttons "3" and "4" on the duplicator until the LED flashes and the last code is restored.



Remarks:

For fixed code &learning code remote controls, the duplicator will work after duplicating.

But for the rolling code brand listed above, please re-match with your origina receiver by follow the original manual after duplicatied.