


Rolling shutter controller for tubular motor Manual

Model: YET863WTR

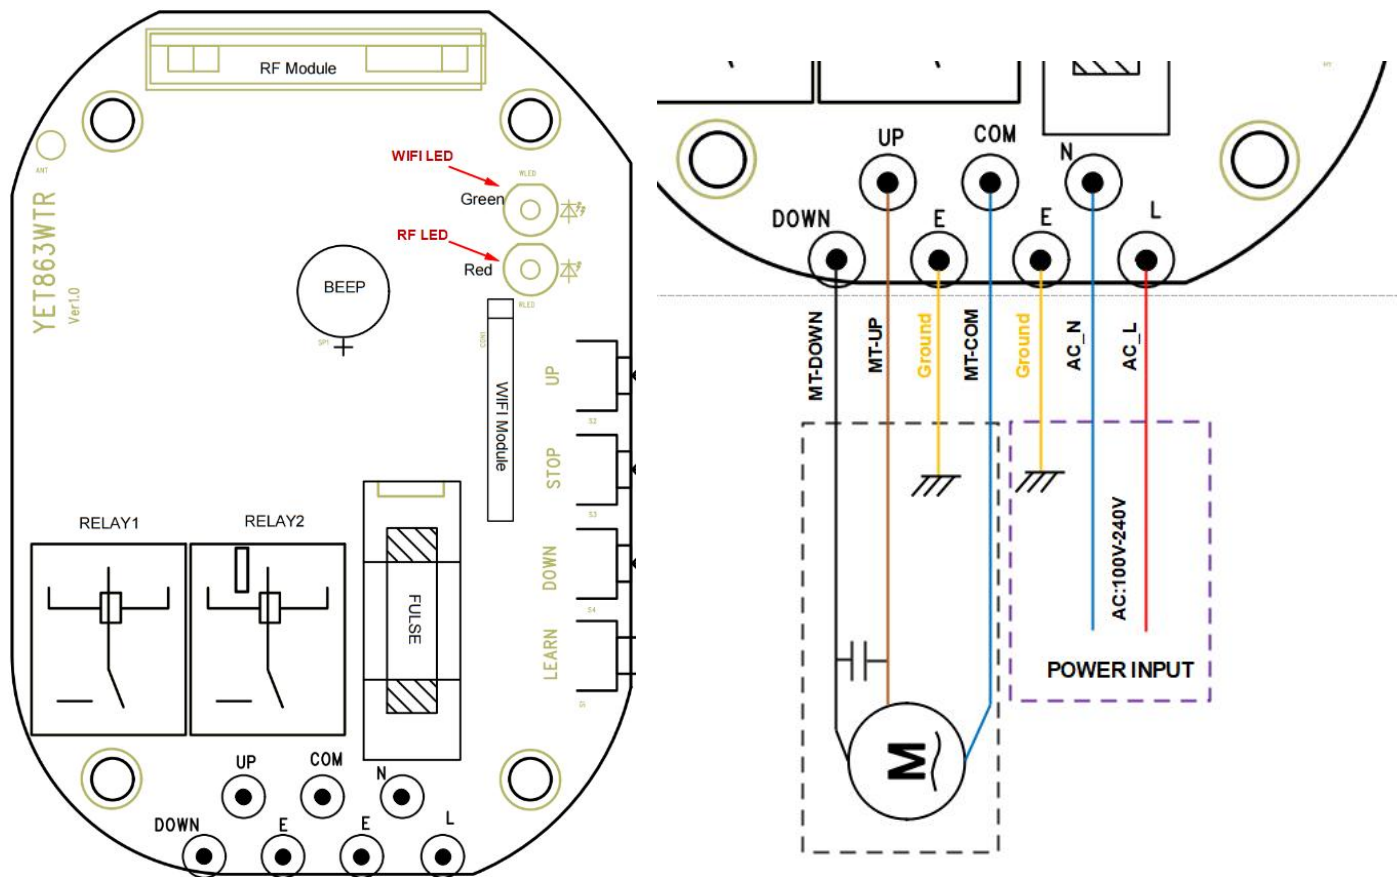

➤ Features:

- ❖ Encode type: learning code 1527
- ❖ RF 433.92Mhz +Tuya WIFI 2.4G
- ❖ External switch
- ❖ Register remote with 2 ways: Power ON/OFF & learning button

➤ Tech data:

- | | |
|--|---|
| ● Working voltage: 100VAC-240V AC | ● Working voltage: 433.92Mhz |
| ● Contact current: ≤NO/NC:10A @250VAC | ● Remote memory: 50pcs |
| ● Motor type: AC motor 100V AC/220V AC | ● Distance in open area: >80M |
| ● Motor power: ≤800W @220VAC | ● Working Temp: -10°C - +60°C |
| ● Receive sensitivity: ≤-110dBm | ● Dimension (L*W*H): 109mm x 73mm x 44mm: |

➤ Function introduction:

- ✓ Register and Deleting Remote control

Register/Add remote:

1. Press the **UP & STOP** button (>1s) at the same time when power ON, you will hear beep-beep-beep and the red LED will flash simultaneous, it means register the remote control success.
2. Short press the learning button on the controller, RED LED will on then off, now enter into the learning mode; press any button on the remote control, you will hear beep-beep-beep and the red LED will flash simultaneous, it means register the remote control success.

Deleting remote:

1. Press the **UP & DOWN** button (>1s) at the same time when power ON, you will hear beep-beep-beep and the red LED will flash simultaneous, it means deleting all the remote controls.
2. Long press the learning code on the controller till RED LED Turns on then off, it means deleting all the remote controls

(Note: if deleting all information success, all the stored information will be cleared, running time will be 240S and the motor direction will be same out of factory)

✓ **Remote control function:**

Press UP button, open the curtain/shutter

Press DOWN button, close the curtain/shutter

Press STOP button, the controller stop working

✓ **Switch the motor direction**

Press the **UP+DOWN+STOP** button (>3s) of the registered remote control at the same time when power ON, you will hear beep-beep-beep and the red LED will flash 3times simultaneous, it means change the motor working direction

➤ **Mobile internet connecting**

- ✓ Searching "TUYA" from your mobile App store and Download and Register

- ✓ Login the App 


- ✓ Connecting the WIFI

1. By Power ON: When the power on, you should Press the STOP+DOWN button (>3s) of the registered remote control within 3s., you will hear beep-beep-beep and the red LED will flash 3times simultaneous, now the device is searching WIFI

2. By learning button: short press the learning button 3 times, green led flash quickly and now is for searching WIFI

- ✓ Green LED quick flash sustainability and it means the device are ready for connect WIFI

- ✓ Click the  or  on the APP page, you will see the below:

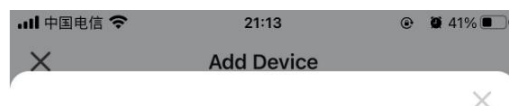

Enter Wi-Fi Information

Choose Wi-Fi and enter password

 MERCURY_C6D4 

 12345678 

- ✓ Write down the WIFI name (SSID) and put the password, click **Next** , you will find the device


Devices to be added: 1




Curtain switch

Add


- ✓ Click **Add** , now is connecting ; you will see

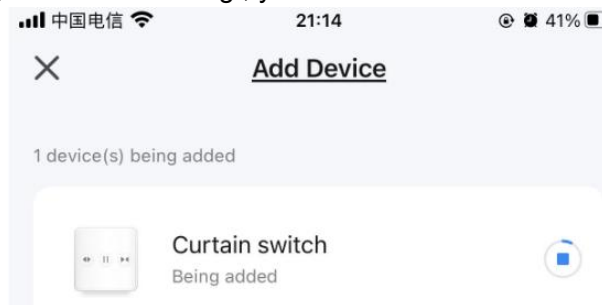


- ✓ After success, you can see:

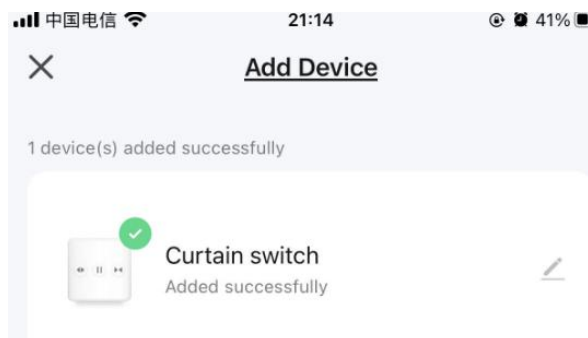

- ✓ Click **Done** , then success for add the device, you will see the device on your main page

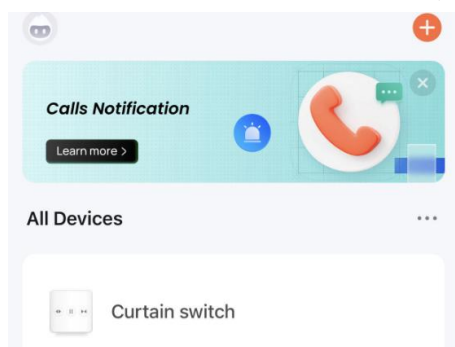

- ✓ Click the device  **Curtain switch** ,
you will see and control your shutter/curtain

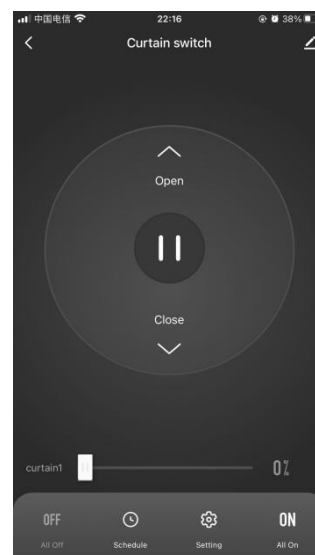


➤ App operation

✓ In the page, you will see the function :

- ✧ Open/stop/close
- ✧ Full open and full close(same as the function of the above open and close)
- ✧ Timing function: setting open and close automatic
- ✧ Running time setting
- ✧ Motor direction setting

✓ **Running time setting: Please make sure the shutter/curtain 100% full closed (contact the close limit), App page must show 0%**

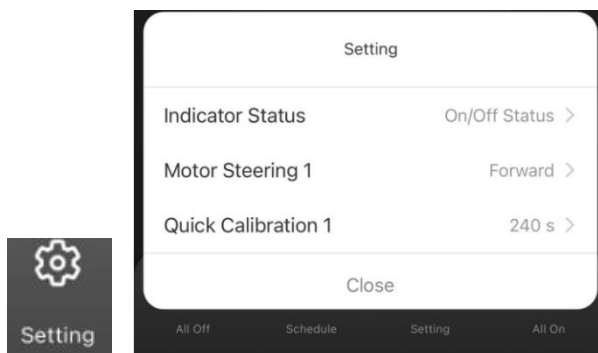

✧ Click , and

choose **Quick Calibration 1** **240 s >**

✧ Enter the any running time you need (motor working time)

✓ Motor direction switch

Click **Motor Steering 1** **Forward >**