

Manual

2-CH receiver switch controller


Match new remote controls:

- 1. Inching mode pairing: Click the learning button once, the indicator light is on, press and hold the remote control that needs to be paired, the indicator light flashes three times, and the indicator light is on, then press and hold the remote control that needs to be paired. The indicator light flashes Three times paired successfully
 - 2. Self-locking mode pairing: press the learning button twice in succession, the indicator light is on, press and hold the remote control A button that needs to be paired. The indicator light flashes three times. Pairing is successful, and then the indicator light is on, then press and hold the remote control B button that needs to be paired to indicate The light flashes three times and the pairing is successful.
 - 3. Interlock mode pairing: press the learning button three times in a row, the indicator light is on, press and hold the remote control A button that needs to be paired, the indicator light flashes three times, the pairing is successful, and then the indicator light is on, and then press and hold the remote control B button that needs to be learned. The light flashes three times and the pairing is successful, and then the indicator light is on, and then press and hold the remote control C key that needs to be learned. The indicator light flashes three times to complete the pairing.
 - 4. One-way self-locking pairing: Tap the learning button four times in succession, the indicator light is on, press and hold the remote control that needs to be paired. The indicator light of the A button flashes three times and the pairing is successful, and then the indicator light is on.
- Clear code:** Press the button eight times, the indicator flashes three times quickly, and all paired remote controls are successfully cleared.

Switch remote control instructions:

- 1. Jog mode remote control: press and hold the A button of the paired remote control, 1 relay will be closed let go
- When the appliance is disconnected, press and hold the B button of the paired remote control, the 2 relays will be closed, and the release relay will be disconnected.

Product diagram

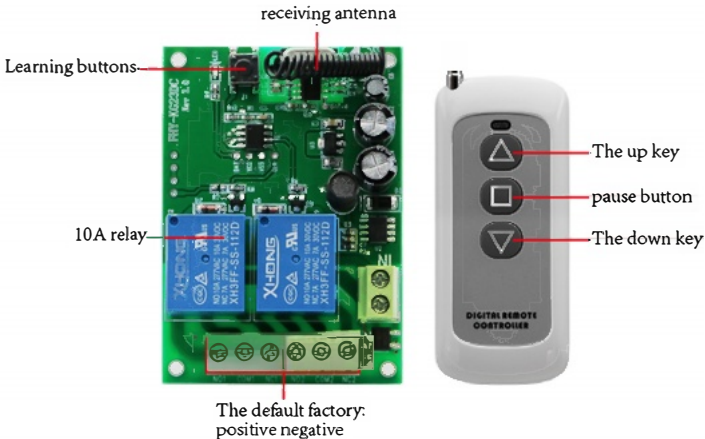

- 2. Self-locking mode remote control: click the A button of the paired remote control, 1 relay is closed, click again
- The remote control A button relay is disconnected, press the paired remote control B button, the 2 relays are closed, click the remote control again
- Controller B button relay is off.
- 3. Interlock mode remote control control: click the A button of the paired remote control, 1 relay is closed, and then click
- There is no change to the remote control A button, and then press the paired remote control B button, one relay will be off, and two relays will be off.
- At this time, there is no change when you press the B button of the remote control. Press the A button to switch to the one-way relay closed and the two-way open. Ren
- How to press the C button of the paired remote control to disconnect 1 relay and 2 relays.
- 4. One-way self-locking mode remote control control: press the A button of the paired remote control, one relay is closed, click
- Press the B button of the paired remote control, 1 relay will be disconnected.

Hardware:

Input	AC 12-75V
Loading	Max 10A
Frequency	RF 433MHz/315MHz

Product wiring diagram

